



ASEP-P

SERIES



DUAL WEIGHING RANGE RETAIL SCALE





ASEP

COMMON FEATURES

- OIML/EC Type Approved Dual Weighing Range Price Computing Scale
- Automatic Shift Between Low and High Weighing Range with Indication on Display Panel
- 99 Unit Price PLUs, Including 5 X One Touch
- User Friendly Functions Include: - Memory Accumulation, Non-Weighed Article, Fixed Unit Price, Paid & Change, Manual Zero & Tare, Auto Power Saving, Power On & Zero Tracking
- 6 x User Selectable Output Baud Rate
- Bold Type Wide Angle LCD display
- Long Battery Operation Time: 120 Hours Plus
- Dual Power Source: - By Built-in Rechargeable Battery or Power Adaptor
- Stainless Steel Platter, Backlight, RS-232C interface, Built-in Rechargeable Battery, Power Adaptor, Bubble Level and Adjustable Feet Included
- Completed with Low Battery and Charging Status Indicators

OPTION AVAILABLE


- Printer Interface Output

SPECIFICATIONS

Model No.	Capacity W ₁ /W ₂ (kg)	Division e ₁ /e ₂ (kg)	Platter
ASEP-6	3/6	0.001/0.002	280x350mm with Stainless Steel Platter Cover
ASEP-15	6/15	0.002/0.005	
ASEP-30	15/30	0.005/0.01	
ASEP-60	30/60	0.01/0.02	
ASEP-6P	3/6	0.001/0.002	
ASEP-15P	6/15	0.002/0.005	
ASEP-30P	15/30	0.005/0.01	
ASEP-60P	30/60	0.01/0.02	
Power Source	By Built-in Rechargeable Battery or Power Adaptor		
Operation	0-40°C (32-104°F)		
Environment	Non-condensed R.H. ≤85%		

* Specifications subject to change without notice

ASEP-P

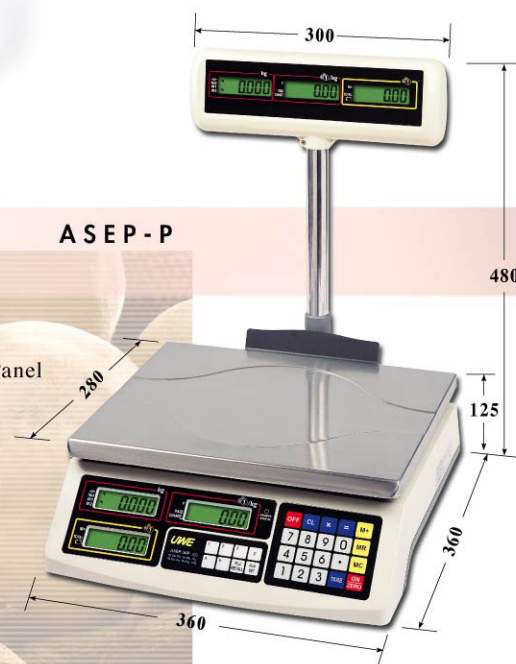

ASEP



unit = mm

LOCAL DISTRIBUTOR INFORMATION



UNIVERSAL WEIGHT ENTERPRISE CO., LTD.
http://www.uwe-scale.com.tw

May 2005 Designed by DAILY
Printed in Taiwan